


RoHS Compliant

成品图

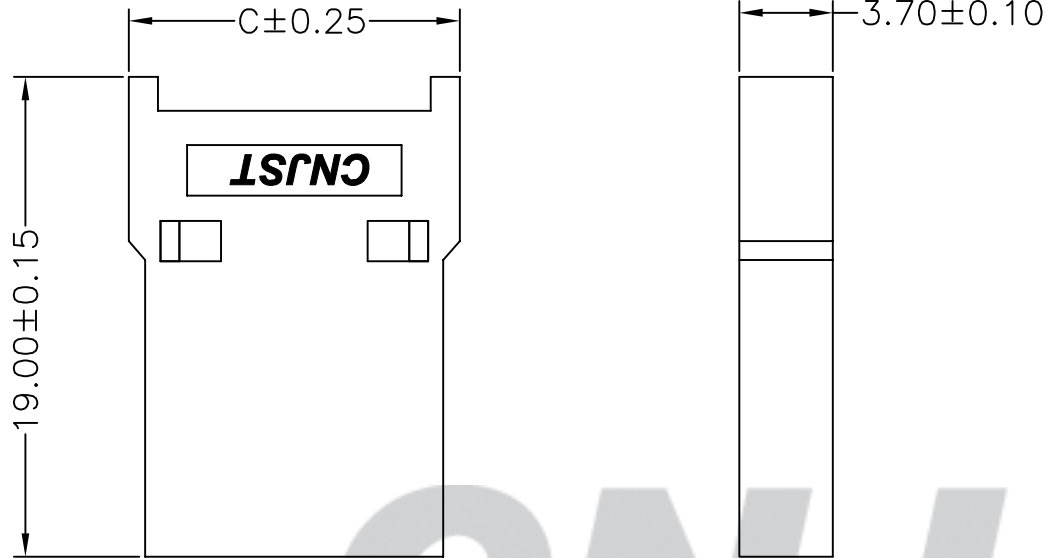



SPECIFICATION

- 1 Contact resistance:  $\leq 10m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 600 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 1800V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**C4001P-\*\*-A6W-P**

PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 02~05	PLASTIC MATERIAL: A6W=PA66 (WHITE)

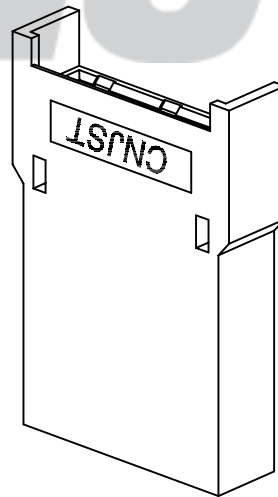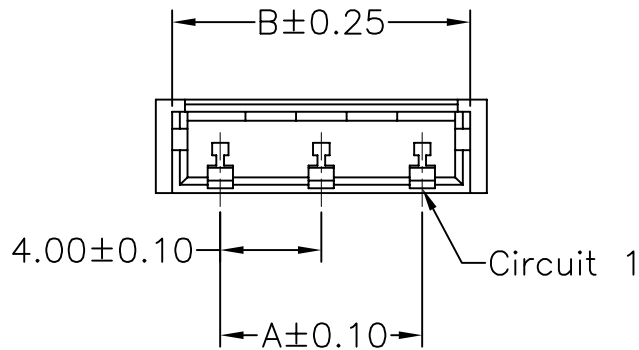

Circuits	Dimensions (mm)		
	A	B	C
02	4.00	7.80	9.10
03	8.00	11.80	13.10
04	12.00	15.80	17.10
05	16.00	19.80	21.10

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 4.00mm PITCH HOUSING	Drawn: 蔡忠忠 2016.05.21
	Model No: C4001P-**-A6W-P	
UNIT: mm	SCALE: FULL	REVISION: B/0
	<b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	
		Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0181

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.21	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White