



RoHS Compliant

成品图

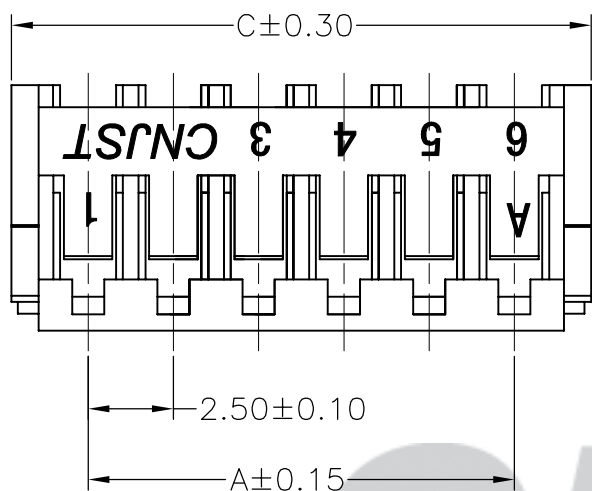

SPECIFICATION



- 1 Contact resistance: $\leq 10m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.5 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2504Y--A6W-P**

PART No. _____
 No. OF CIRCUITS: 02~15
 PACKAGING: P=PE
 PLASTIC MATERIAL: A6W=PA66 (WHITE)

CNJST

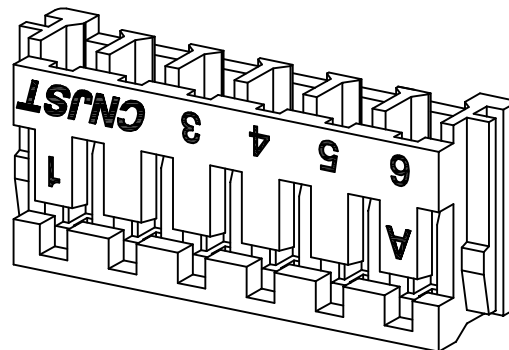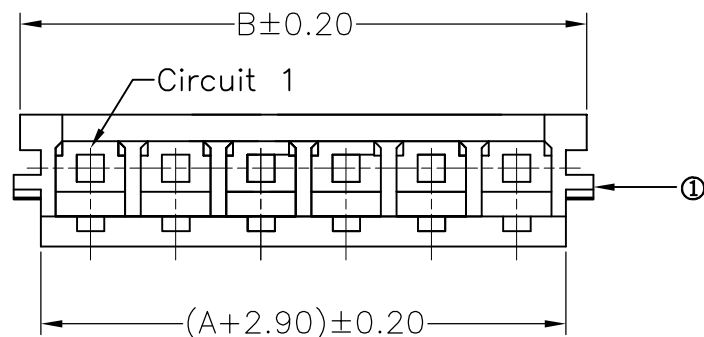

Circuits	Dimensions (mm)		
	A	B	C
02	2.50	6.62	7.00
03	5.00	9.12	9.50
04	7.50	11.62	12.00
05	10.00	14.12	14.50
06	12.50	16.62	17.00
07	15.00	19.12	19.50
08	17.50	21.62	22.00
09	20.00	24.12	24.50
10	22.50	26.62	27.00
11	25.00	29.12	29.50
12	27.50	31.62	32.00
13	30.00	34.12	34.50
14	32.50	36.62	37.00
15	35.00	39.12	39.50

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 2.50mm PITCH HOUSING		Drawn: 蔡忠忠 2016.05.09
	Model No: A2504Y-**-A6W-P		
UNIT: mm	SCALE: FULL	REVISION: B/0	Checked: 林旭芝
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD		Approved: 刘祚杰
			DWG NO. CNJST/GCCP-0081

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.09	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White