RoHS Compliant

成品图

SPECIFICATION

1 Contact resistance: ≤20mΩ
2 Insulation resistance: ≥1000MΩ
3 Rated voltage: 250 V AC DC
4 Rated current: 1.0 A AC DC
5 Withstand Voltage: 2000V AC/minute
6 Temperature Range:-25℃～ +105℃

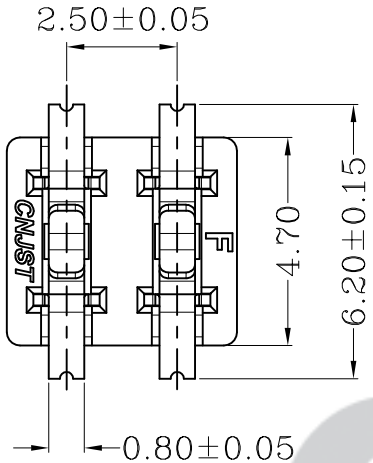



ORDER INFORMATION:

T2502MWV-02-F2MB-R

- PART No.
- No. OF CIRCUITS: 02
- PLASTIC MATERIAL: F2M=LCP(Nature)
- PACKAGING: R=Reel
- PLATING: B=Mattn Sn

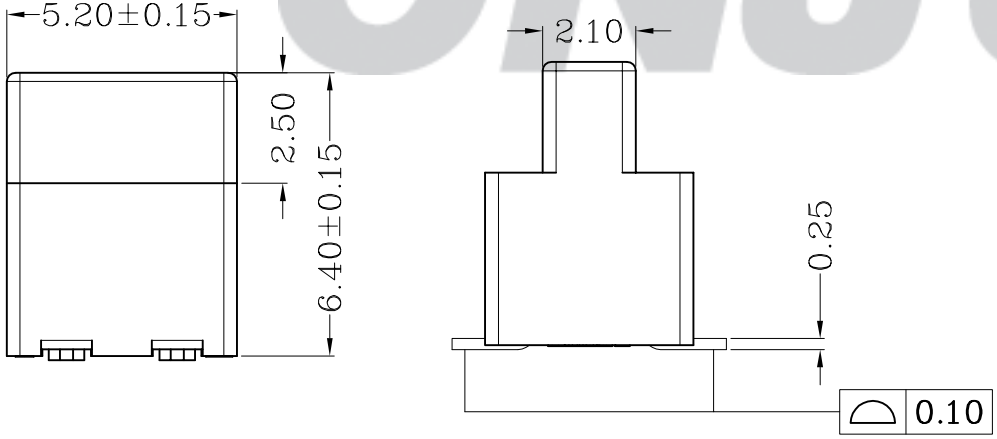

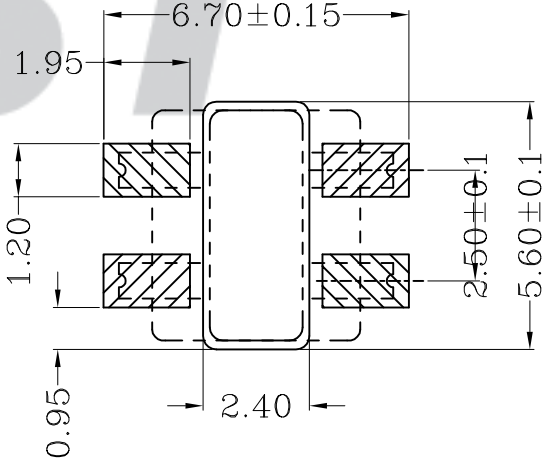

RECOMMENDED PCBLAYOUT

CNJST

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.12	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
②	Material	4	Phosphor Bronze	Mattn Sn
①	Insulator	1	LCP(UL94V-0)	Nature(Beige)

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

Model Name:2.50mm pitch 180° Wafer-SMT TYPE
Model No: T2502MWV-02-F2MB-R

SCALE:FULL | REVISION:B/0

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn:张育斌2016.06.12
Checked: 林旭芝
Approved: 刘祚杰
DWG NO.CNJST/GCCP-0456