

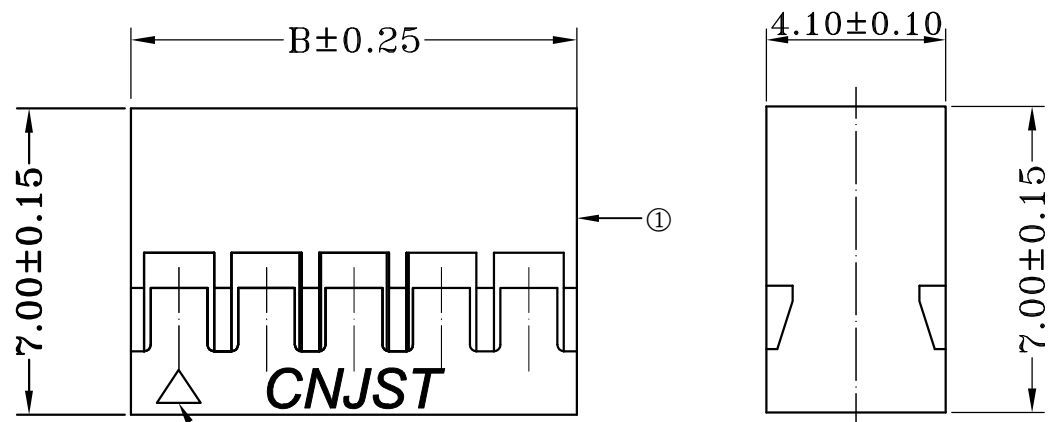


RoHS Compliant

成品图

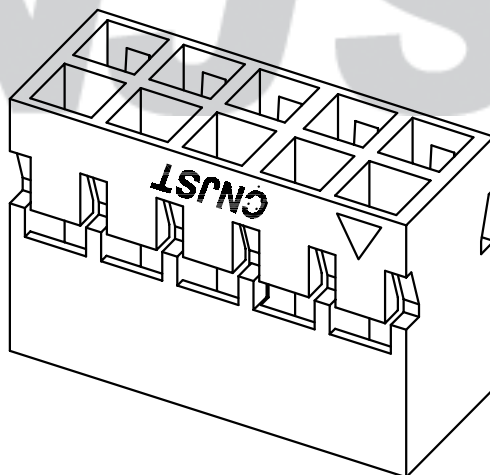

Circuit 1

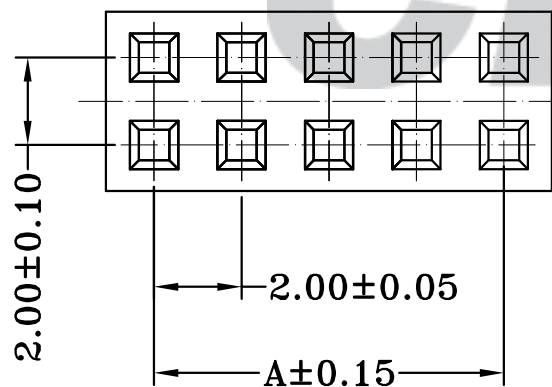

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

A2005Y-*-A8K-P**

PART No. _____
 No. OF CIRCUITS: _____
 PACKAGING: P=PE
 PLASTIC MATERIAL: A8K=PA66 (BLACK)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
202 (2X2)	2.00	4.20	212 (2X12)	22.00	24.20
203 (2X3)	4.00	6.20	213 (2X13)	24.00	26.20
204 (2X4)	6.00	8.20	214 (2X14)	26.00	28.20
205 (2X5)	8.00	10.20	215 (2X15)	28.00	30.20
206 (2X6)	10.00	12.20	216 (2X16)	30.00	32.20
207 (2X7)	12.00	14.20	217 (2X17)	32.00	34.20
208 (2X8)	14.00	16.20	218 (2X18)	34.00	36.20
209 (2X9)	16.00	18.20	219 (2X19)	36.00	38.20
210 (2X10)	18.00	20.20	220 (2X20)	38.00	40.20
211 (2X11)	20.00	22.20			

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.09	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Black

Tolerance
 X.X ±0.30
 X.XX ±0.20
 X.XXX ±0.10
 Angle ±3.0°

Model Name: 2.00mm PITCH HOUSING
 Model No: A2005Y-***-A8K-P

SCALE: FULL REVISION: B/0

UNIT: mm

CNJST 浙江捷仕泰电子有限公司
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.05.09
 Checked: 林旭芝
 Approved: 刘祚杰
 DWG NO. CNJST/GCCP-0065