

RoHS Compliant

成品图

SPECIFICATION


- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1010AWR -**F2MB-R-H


PART No. No. OF CIRCUITS: PLASTIC MATERIAL: PACKAGING: R=REEL PLATING: A=Tin-plated B=Matte Sn

F2M=LCP (NATURE)

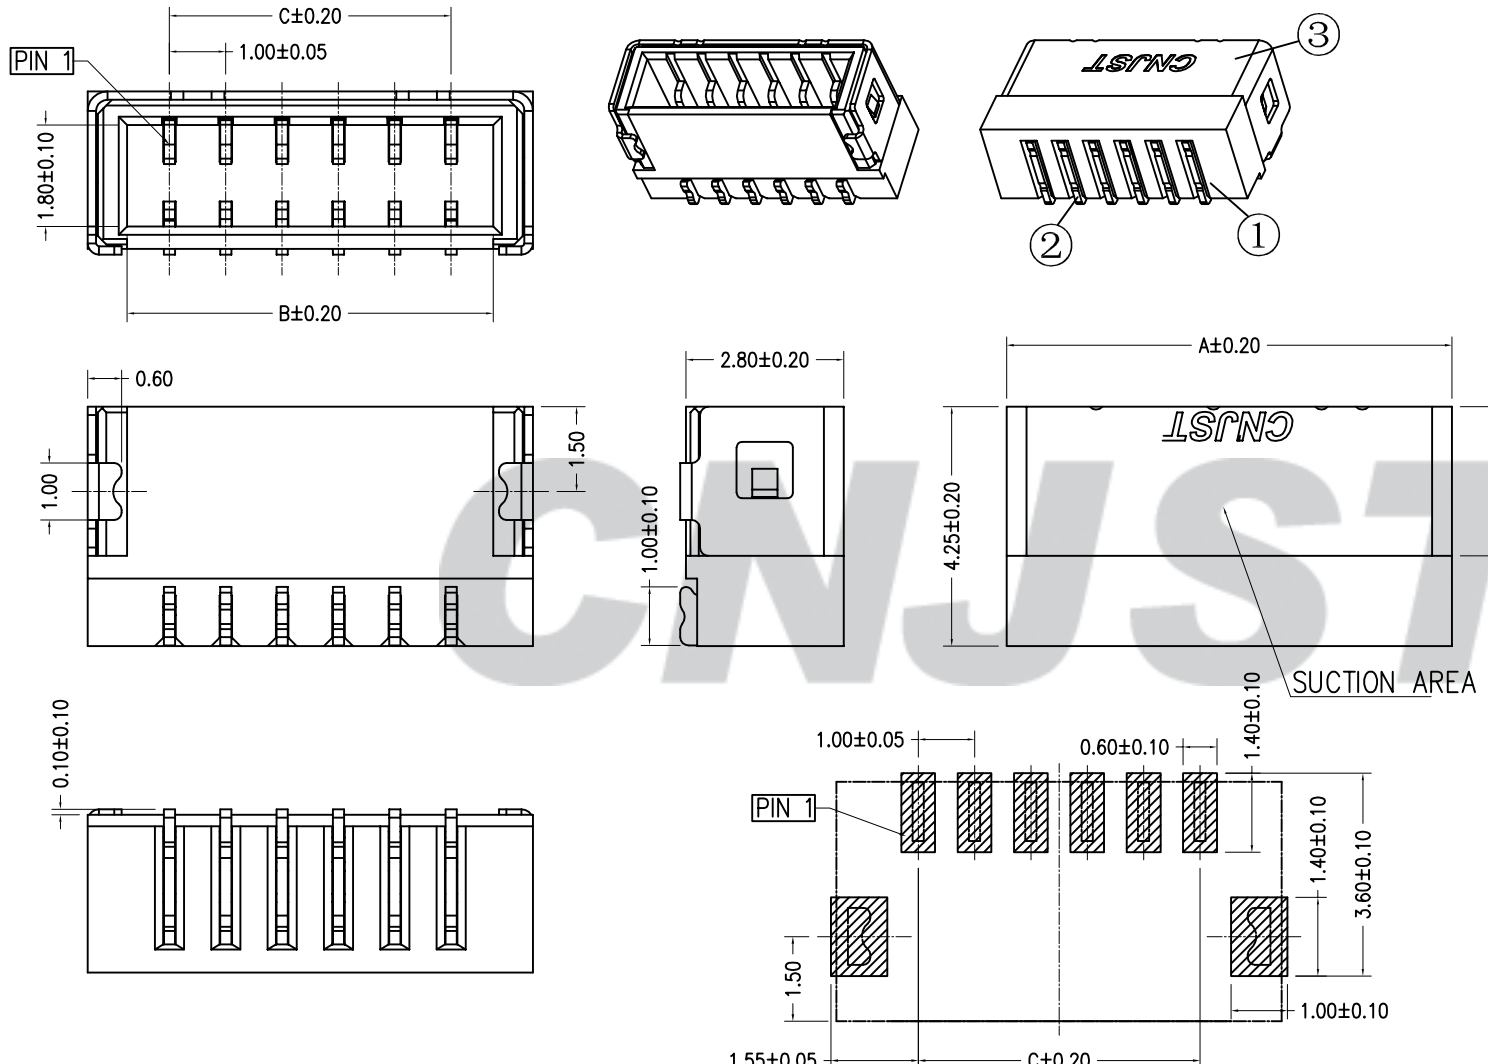

Circuits	Dimensions (mm)		
	A	B	C
02	3.90	2.50	1.00
03	4.90	3.50	2.00
04	5.90	4.50	3.00
05	6.90	5.50	4.00
06	7.90	6.50	5.00
07	8.90	7.50	6.00
08	9.90	8.50	7.00
09	10.90	9.50	8.00
10	11.90	10.50	9.00
11	12.90	11.50	10.00
12	13.90	12.50	11.00

SUGGESTED PCB LAYOUT (COMPONENT SIDE)

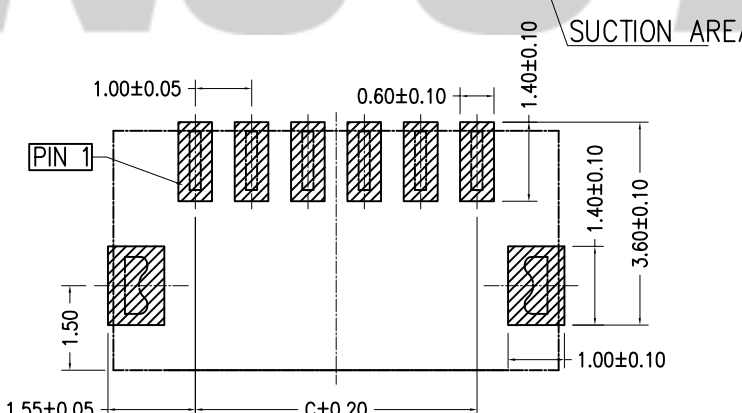

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00mm pitch 90° WAFER-SMT TYPE	SCALE: FULL REVISION: B/0	Drawn: 张育斌 2016.04.26
	Model No: A1010AWR-**-F2MB-R-H		Checked: 林旭芝
UNIT: mm			Approved: 刘祚杰
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONICS CO., LTD.		DWG NO. CNJST/GCCP-0388

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		③	Solder Tab	2	Phosphor Bronze	Mattn Sn
				②	Contacts	02~12	Phosphor Bronze	Mattn Sn
				①	Insulator	1	LCP	Nature