

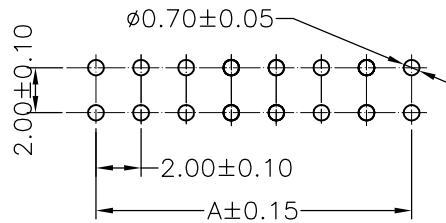
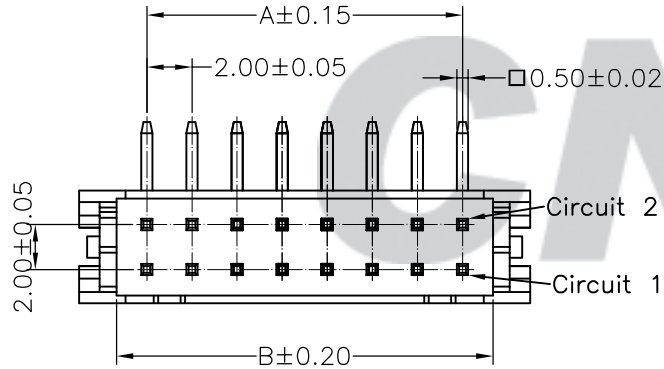
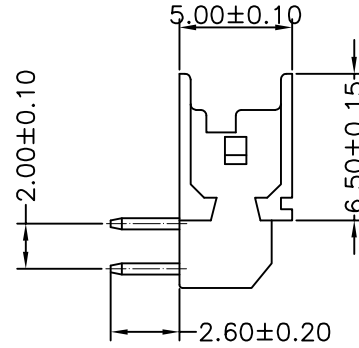


RoHS Compliant

成品图

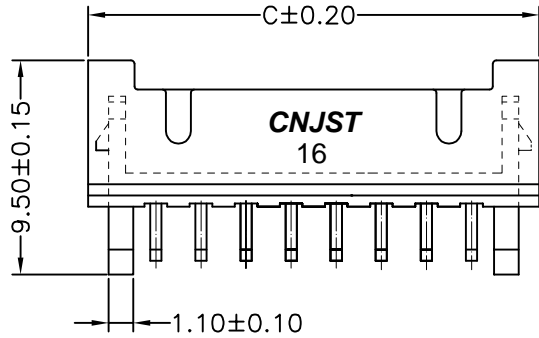

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

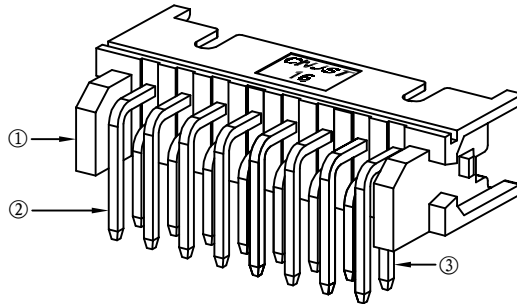

SPECIFICATION

- 1 Contact resistance: $\leq 10m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2003AWD-*-A1MA-B-D**

PART No. _____

No. OF CIRCUITS: _____

2X2~2X15

PLASTIC MATERIAL: _____

A1M=PA66

PACKAGING: _____

B=TRAY

PLATING: _____

A=Tin-plated

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		B	C	
202 (2X2)	2.00	4.70	8.00	209 (2X9)	16.00	18.70	22.00
203 (2X3)	4.00	6.70	10.00	210 (2X10)	18.00	20.70	24.00
204 (2X4)	6.00	8.70	12.00	211 (2X11)	20.00	22.70	26.00
205 (2X5)	8.00	10.70	14.00	212 (2X12)	22.00	24.70	28.00
206 (2X6)	10.00	12.70	16.00	213 (2X13)	24.00	26.70	30.00
207 (2X7)	12.00	14.70	18.00	214 (2X14)	26.00	28.70	32.00
208 (2X8)	14.00	16.70	20.00	215 (2X15)	28.00	30.70	34.00

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/O	2016.05.06	NEW RELEASE		③	Contacts	2~15	Brass	Tin-plated
				②	Contacts	2~15	Brass	Tin-plated
				①	Insulator	1	PA66 (UL94V-0)	Nature

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

Model Name: 2.00mm PITCH 90° WAFER
Model No: A2003AWD-***-A1MA-B-D

SCALE: FULL REVISION: B/0

UNIT: mm

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.05.06
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0059