


RoHS Compliant




成品图

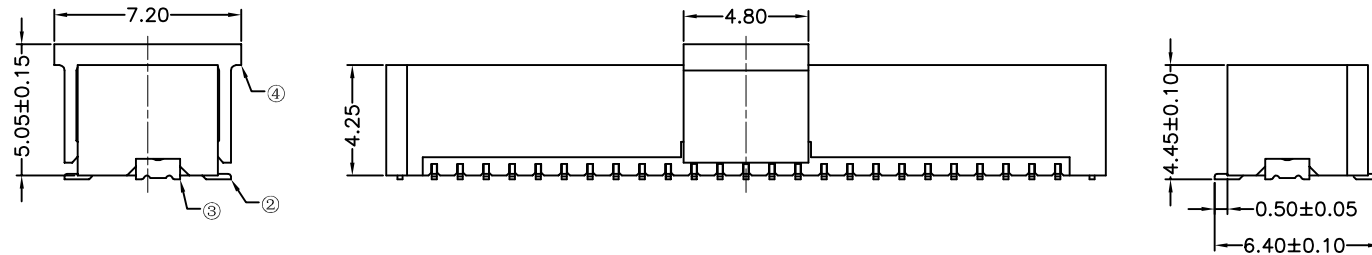


SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

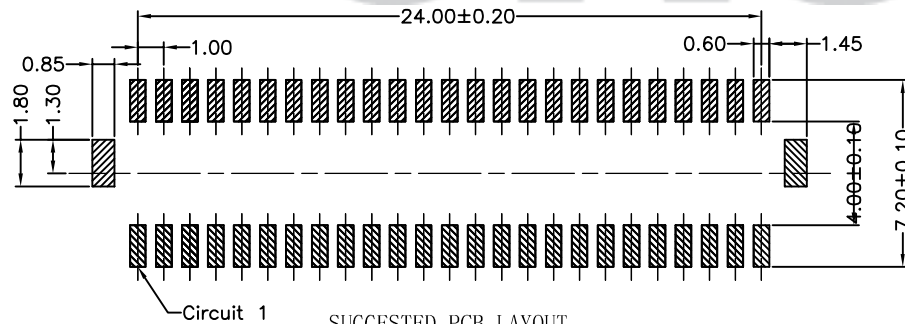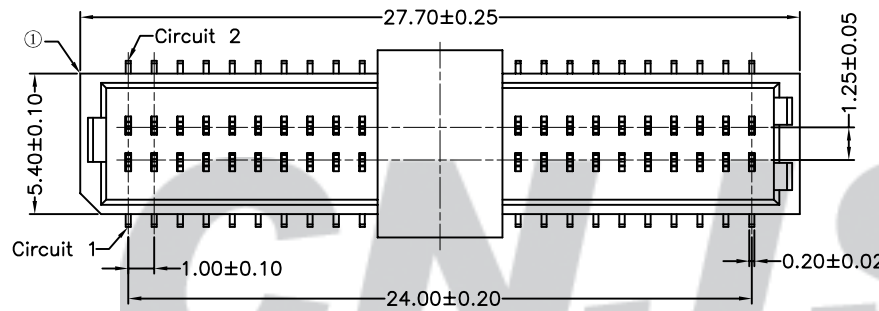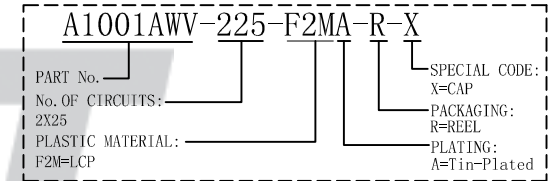

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

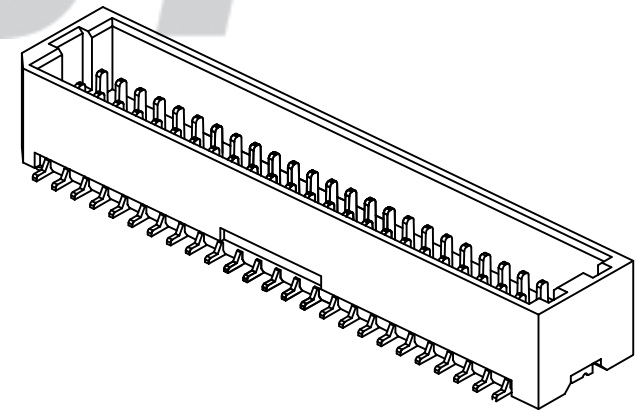

④	Cap	1	LCP (UL94V-0)	Beige
③	Solder Tab	2	Phosphor Bronze	Tin-plated
②	Contacts	50	Phosphor Bronze	Tin-plated
①	Insulator	1	LCP (UL94V-0)	Nature
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

Model Name: 1.00mm pitch 180° WAFER-SMT TYPE
Model No: A1001AWV-225-F2MA-R-X

	SCALE: FULL	REVISION: B/0
--	-------------	---------------

UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD
----------	--

Drawn: 张育斌 2016.06.11
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0249

B/0	2016.04.12	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.
1			