RoHS Compliant

成品图

SPECIFICATION

1 Contact resistance: ≤10mΩ
2 Insulation resistance: ≥1000MΩ
3 Rated voltage: 2000 V AC DC
4 Rated current: 5.0 A AC DC
5 Withstand Voltage: 2200V AC/minute
6 Temperature Range:-25℃～ +85℃

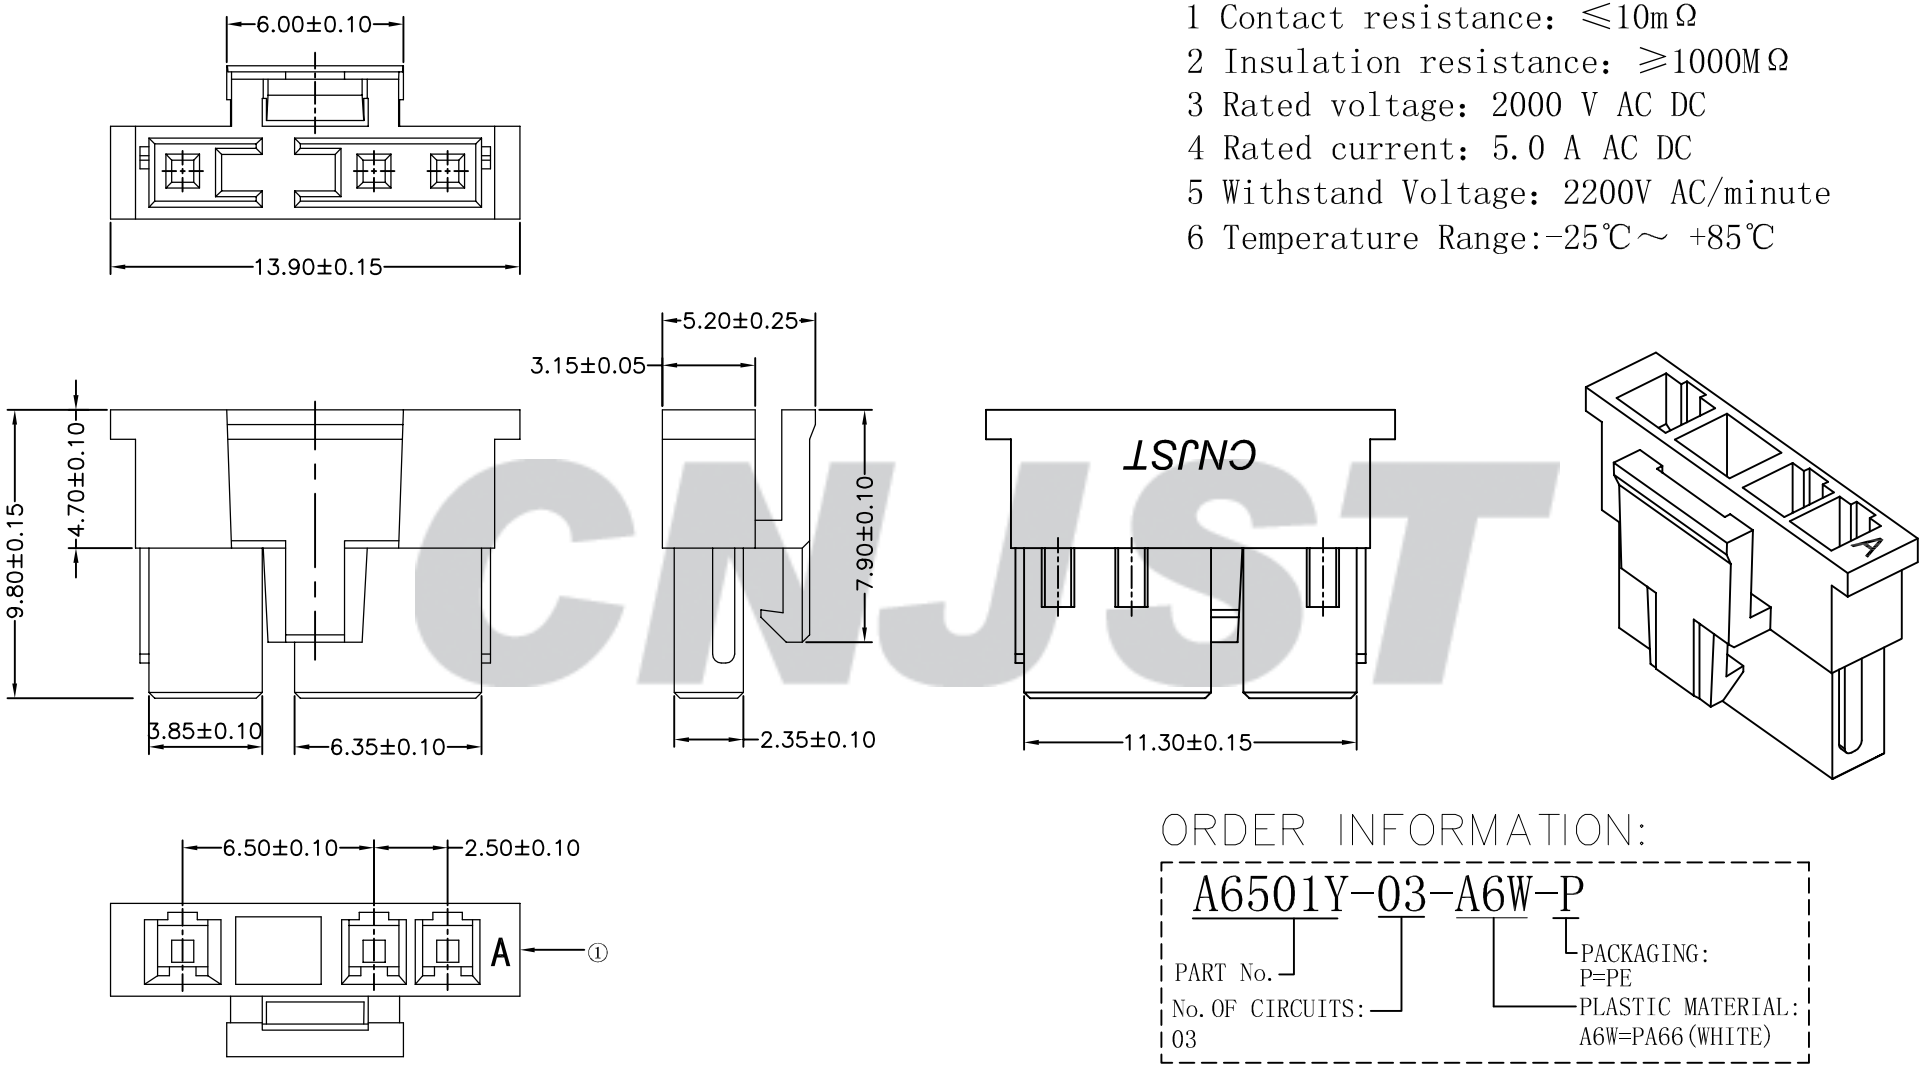

ORDER INFORMATION:

A6501Y-03-A6W-P

- A6501Y: PART No.
- 03: No. OF CIRCUITS: 03
- A6W: PLASTIC MATERIAL: A6W=PA66(WHITE)
- P: PACKAGING: P=PE

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.12	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
①	Insulator	1	PA66(UL94V-0)	White

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

Model Name:6.50-2.50mm pitch Housing
Model No: A6501Y-03-A6W-P
SCALE:FULL
REVISION:B/0

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn:张育斌2016.06.12
Checked: 林旭芝
Approved: 刘祚杰
DWG NO.CNJST/GCCP-0210