

RoHS Compliant

成品图


SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 500M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 0.5 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

F1001AWV-**-B1MA-G

PART No. _____ PACKAGING:
 No. OF CIRCUITS: _____ G=TUBE
 04~60 A=TRAY
 PLASTIC MATERIAL: _____ PLATING:
 BIM=PA46 A=Tin-Plated

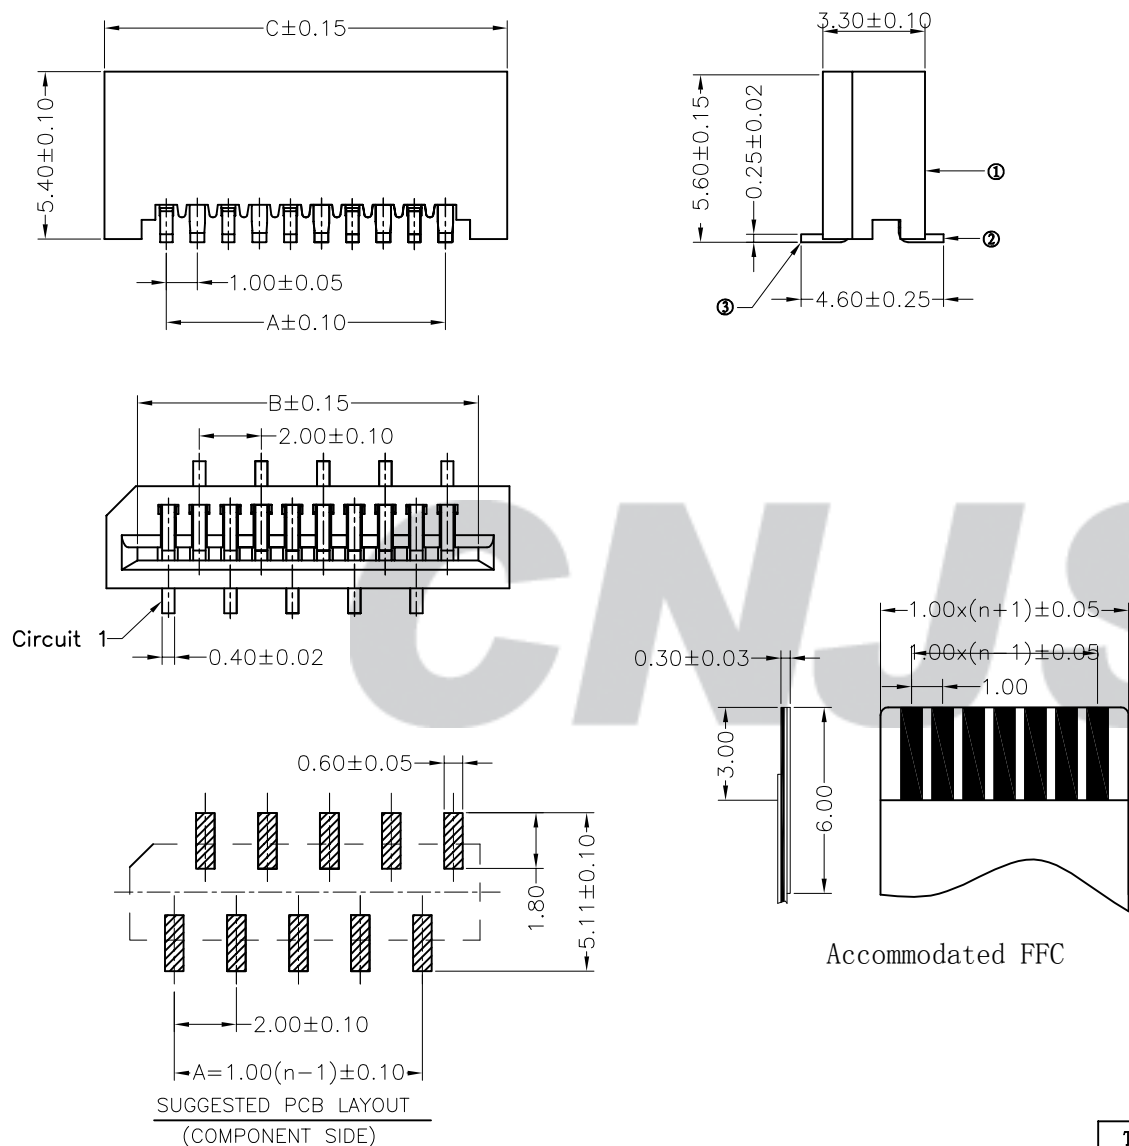

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
04	3.00	5.00	7.00	33	32.00	34.00	36.00
05	4.00	6.00	8.00	34	33.00	35.00	37.00
06	5.00	7.00	9.00	35	34.00	36.00	38.00
07	6.00	8.00	10.00	36	35.00	37.00	39.00
08	7.00	9.00	11.00	37	36.00	38.00	40.00
09	8.00	10.00	12.00	38	37.00	39.00	41.00
10	9.00	11.00	13.00	39	38.00	40.00	42.00
11	10.00	12.00	14.00	40	39.00	41.00	43.00
12	11.00	13.00	15.00	41	40.00	42.00	44.00
13	12.00	14.00	16.00	42	41.00	43.00	45.00
14	13.00	15.00	17.00	43	42.00	44.00	46.00
15	14.00	16.00	18.00	44	43.00	45.00	47.00
16	15.00	17.00	19.00	45	44.00	46.00	48.00
17	16.00	18.00	20.00	46	45.00	47.00	49.00
18	17.00	19.00	21.00	47	46.00	48.00	50.00
19	18.00	20.00	22.00	48	47.00	49.00	51.00
20	19.00	21.00	23.00	49	48.00	50.00	52.00
21	20.00	22.00	24.00	50	49.00	51.00	53.00
22	21.00	23.00	25.00	51	50.00	52.00	54.00
23	22.00	24.00	26.00	52	51.00	53.00	55.00
24	23.00	25.00	27.00	53	52.00	54.00	56.00
25	24.00	26.00	28.00	54	53.00	55.00	57.00
26	25.00	27.00	29.00	55	54.00	56.00	58.00
27	26.00	28.00	30.00	56	55.00	57.00	59.00
28	27.00	29.00	31.00	57	56.00	58.00	60.00
29	28.00	30.00	32.00	58	57.00	59.00	61.00
30	29.00	31.00	33.00	59	58.00	60.00	62.00
31	30.00	32.00	34.00	60	59.00	61.00	63.00
32	31.00	33.00	35.00				

Tolerance X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10 Angle $\pm 3.0^{\circ}$	Model Name: 1.00mm PITCH FPC/FPC Connector-SMT TYPE	SCALE: FULL	REVISION: B/0	Drawn: 蔡忠忠 2016.05.03
	Model No: F1001AWV-**-B1MA-G			Checked: 林旭芝
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD			Approved: 刘祚杰
				DWG NO. CNJST/GCCP-0007

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.03	NEW RELEASE		③	Contacts	2~30	Phosphor Bronze	Tin-plated
				②	Contacts	2~30	Phosphor Bronze	Tin-plated
				①	Insulator	1	PA46(UL94V-0)	Nature