


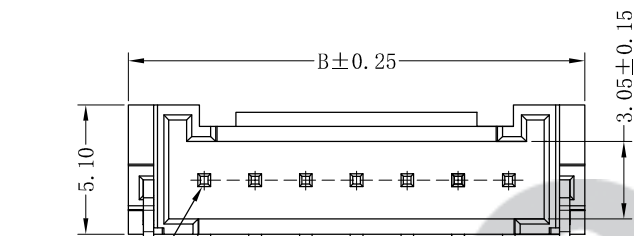

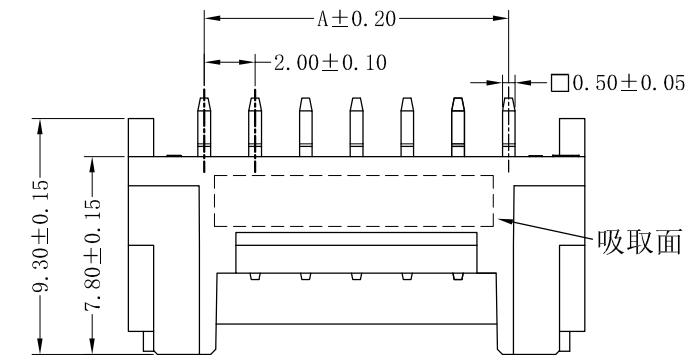


RoHS Compliant

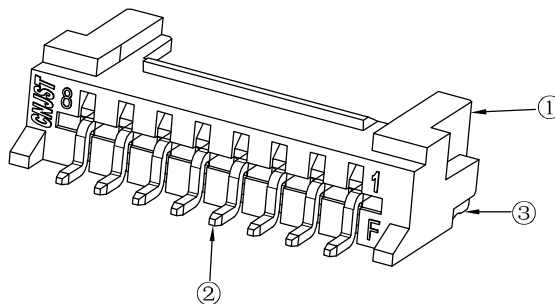

产品平贴后固定PIN、PIN针
与焊接面间隙不大于0.1mm

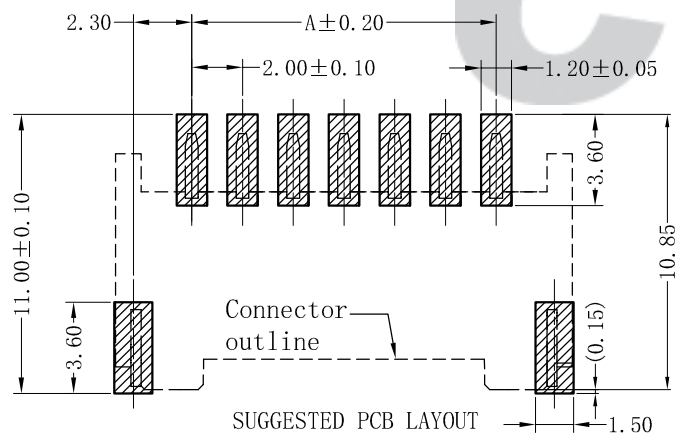

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

A2004AWR-**-D1MB-R

PART No.
No. OF CIRCUITS:
102~15
PLASTIC MATERIAL:
D1M=PA9T (Nature)
PACKAGING:
R=Reel
PLATING:
B=Matte Sn

Circuits	Dimensions (mm)		
	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80

专利产品

注：建议客户优先选择我司公母端产品配套使用，若在没有使用我司公母端配套产品
情况下，出现因产品不匹配的质量问题，我司将不承担任何风险及责任。

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/O	2022.07.10	更新模版	黄美程	③	Solder Tab	2	Brass	Tin-plated
B/O	2020.01.09	NEW RELEASE	徐广	②	Contacts	2~15	Brass	Matte Sn
				①	Insulator	1	PA9T (UL94V-0)	Nature

Tolerance	
X.X ±0.30	
X.XX ±0.20	
X.XXX ±0.10	
Angle ±3.0°	
UNIT: mm	

CNJST 捷仕泰企业

Model No.: A2004AWR-**-D1MB-R
Model Name: 2.00mm pitch 90° WAFER-SMT TYPE

SCALE: FULL
REVISION: C/O

Drawn: 黄美程 2022.07.10

Checked: 吴丹平

Approved: 林旭芝

DWG NO. CNJST/GCCP-0274